

Cableprint CP 2Z

The cableprinter CP 2Z is a tandem printing machine working by traction and using the direct gravure method. This machine is particularly adapted to the printing of cables, hoses, tubes, and the two printing heads enable a quick text and colour change. The cableprinter CP 2Z fully complies with CE norms.

Standard version

- 2 printing heads for concave or plain wheel Ø 86,0 mm
- 2 shafts for mounting hole Ø 12,7 mm
- 2 scraper brackets with scrapers
- 2 counter rollers
- 2 ink spraying systems with by-pass valves
- 1 switch over ink regulation valve
- 1 ink pump with cooling system and reservoir for to 2 kg
- 1 motorised stand with adjustable height from 900 to 1200 mm
- 1 tool set

Accessories

- 2nd ink pump with cooling system and reservoir for to 2 kg

Technical Data

- Printing area from 0,8 up to 25,0 mm
- Printing speed results from traction
- Power supply: 400V, 50 Hz, 3-phase
- Machine weight: about 85 kg
- Ink pump weight: about 23 kg
- Dimensions: width 500 mm, depth 470 mm



Location

The ideal location is between the first and the second cooling trough. Other locations are possible, but subjected to testing. Precondition for quality printing is a clean and dry cable surface.

One-stop shopping

From printing wheels and machines, corona treatment, viscosity control systems, inks, special solvents and special cleaners to custom-built machines – **RSD Technik** offers solutions to meet all your needs.

We reserve the right for technical improvements

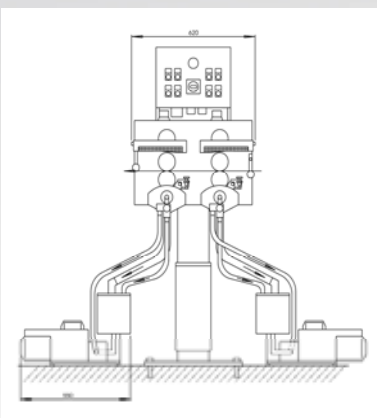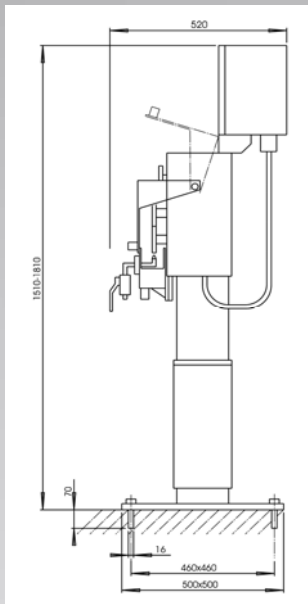

RSD TECHNIK GmbH

Walter-Wetzel-Straße 2 · D-79588 Efringen-Kirchen · Telefon +49 76 28 8020 · Fax +49 76 28 8 02 80
E-Mail: sales@rsdtechnik.de · Internet: www.rsdsdtechnik.de

11/2011